



The Ravelle™ direct-vent gas fireplaces balance elegant design, premium-quality construction, and two heating capacities for unmatched flexibility.

**LENNOX**  
HEARTH PRODUCTS

DAVE LENNOX  
*signature*  
COLLECTION



**Ravelle™ 42** shown with black nickel Classic face and brushed nickel Aspen™ insets.

■ The Ravelle™ direct-vent gas fireplaces are a unique combination of high-efficiency heating capacity and versatile, elegant design. The Ravelle 30 delivers 30,000 BTUs for moderately sized areas, including bedrooms and dens, and features a brilliant, glowing ember bed and hand-painted logs. The Ravelle 42 features a unique, towering fire presentation with exceptionally detailed logs cast from real wood and produces an impressive 42,000 BTUs to heat large areas. With a variety of faces available, many in four different finish options, each Ravelle fireplace can be customized to fit into almost any décor. In addition to offering a variety of options, every Ravelle fireplace is built with premium-grade materials and the utmost commitment to quality. ■



## ARCH FACE



*Ravelle™ 42 shown with brushed nickel Arch face, brushed nickel Tuscan insets and standard brick liner.*

The Arch face, with its soft curve, creates a perfect frame for the warm, dancing fire produced by the Ravelle fireplaces. The variety of finishes and insets available allows you to customize your fireplace to fit your unique home and lifestyle. Choose from four different finishes (gold, brushed nickel, black nickel and black) and three different insets (Aspen™, Napa™, and Tuscan™) to build the perfect look for your fireplace.



### INSET DESIGNS



*Aspen™*



*Napa™*



*Tuscan™*

### AVAILABLE FINISHES




*Gold*

*Brushed  
nickel*

*Black  
nickel*

*Black*

## CLASSIC FACE

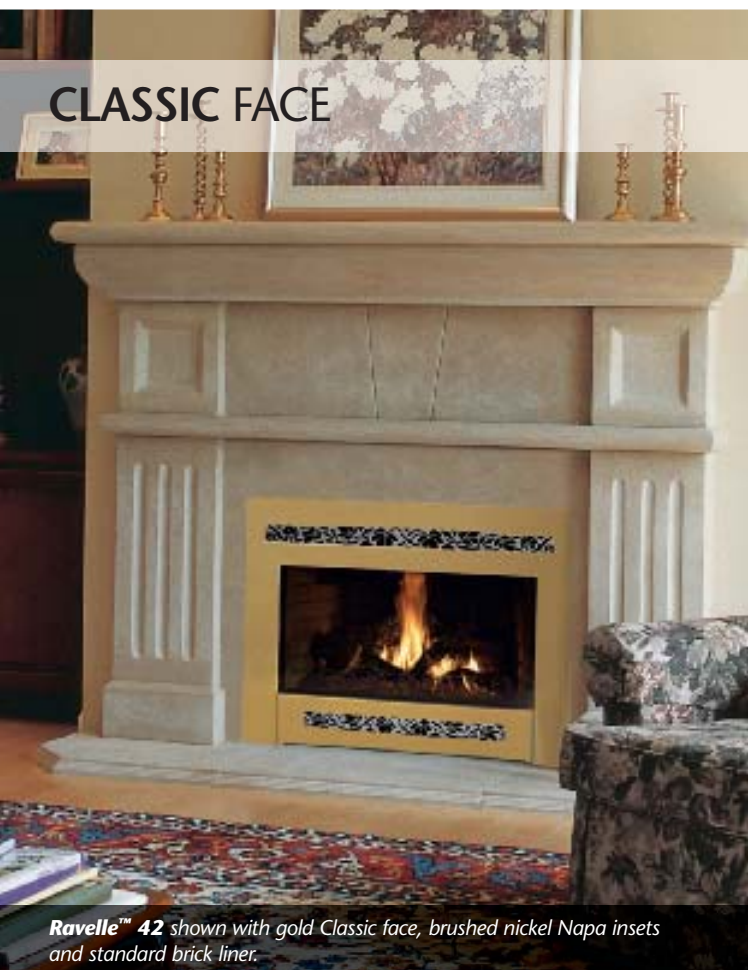

*Ravelle™ 42 shown with gold Classic face, brushed nickel Napa insets and standard brick liner.*

The Classic face has a simple and understated design that will fit any décor. Select from four different finishes (gold, brushed nickel, black nickel, and black) and three different insets (Aspen, Napa, and Tuscan), to create the perfect statement for your hearth.



### INSET DESIGNS



*Aspen*



*Napa*



*Tuscan*

### AVAILABLE FINISHES



*Gold*

*Brushed  
nickel*

*Black  
nickel*

*Black*



## SCREEN FACE



*Ravelle™ 42 shown with Screen face and standard brick liner.*

The Screen face has a clean look accented with soft curves and a screen to diffuse the light of the dancing flames. The understated design of the face allows it to fit naturally into almost any style of home. With subtle elegance, the Screen face brings the timeless appeal of an open wood-burning fireplace to your home and provides a barrier to prevent direct contact with the hot glass surface.



## FOUNDRY™ FACE



*Ravelle™ 42 shown with Foundry™ face.*

The Foundry™ face, with its hand-hammered black nickel straps, provides a rustic elegance to any home. Each face is made by hand and is an original piece—no two Foundry faces will ever be the same.



## CAST PILLAR FACE (Ravelle™ 30 only)



*Ravelle™ 30 shown with Cast Pillar face with Bar grilles.*

With its stately columns and choice of delicate filigree or more contemporary bar grille, the Cast Pillar face will complement and anchor any room. The dimension and beauty of a cast face and a large bay window combine to create a striking piece of architecture for your home.




*Cast Pillar face with Bar grilles*



*Cast Pillar face with Filigree grilles*


## FORCED-AIR DUCT KIT (Ravelle 42 only)

The optional Forced-Air Duct Kit allows you to direct warm air from your Ravelle 42 DV fireplace into adjacent rooms, either above or next to the fireplace, up to 20 ft. away. Ask your dealer for details.

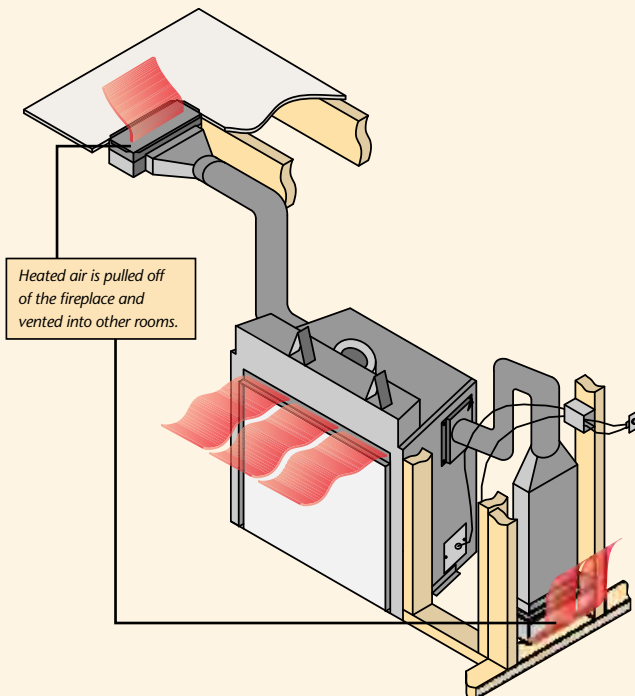

## INSTALLATION CONFIGURATIONS

The Ravelle™ fireplace can be installed in residential living rooms, bedrooms, bathrooms, kitchens or mobile homes in these various configurations.

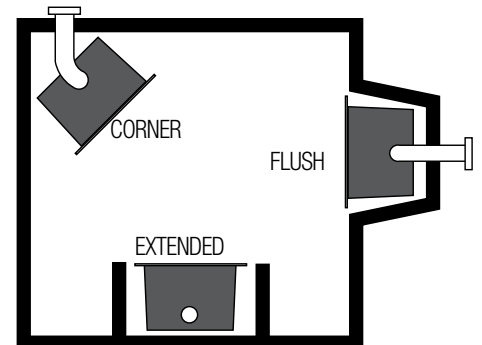




# CUSTOMIZE TO YOUR TASTE

## STEP 1: MODEL AND BTU LEVEL


Choose the Ravelle™ 30 or Ravelle 42 based on your specific heating needs.

**RAVELLE™ 30**



**30,000 BTUs**  
400–1,400 SQ. FT.\*

**RAVELLE 42**



**42,000 BTUs**  
1,000–2,250 SQ. FT.\*


## STEP 2: FACE

Choose your face and finish.

### A) Arch




Choose your face color and choose your inset color. All faces and insets available in gold, brushed nickel, black nickel, and black.



### B) Classic



Choose your face color and choose your inset color. All faces and insets available in gold, brushed nickel, black nickel, and black.



### C) Screen\*\*



### D) Foundry™



### E) Cast Pillar (Ravelle 30 only)



Cast Pillar face with Filigree grilles



Cast Pillar face with Bar grilles

## STEP 3: LINER (required)

Customize your Ravelle with a hand-painted refractory panel. Each panel is cast from real brick or stone and finished by hand for a truly authentic surface.



Tan Brick



Red Brick



Architectural Stone  
(Ravelle 42 only)


## STEP 4: THERMOSTAT (optional)

Adjust the comfort level of your room or home with a convenient hand-held remote thermostat (Ravelle 42 only). Wall-mounted thermostat also available.




## STEP 5: WHOLE-HOME COMFORT SYSTEM (optional)

This pressure-differentiating cold air return system circulates heated air throughout your home. Ask your dealer for details.



## STEP 6: FORCED-AIR DUCT KIT (optional—Ravelle 42 only)

Allows your Ravelle 42 fireplace to direct warm air to adjacent rooms. Ask your dealer for details.



\*Square-foot heating capacities are approximations only. Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

\*\*Provides a barrier to prevent direct contact with hot glass surface

## LOG SETS



### STANDARD FEATURES

Variety of faces and finishes available to complement a broad range of architectural styles

State-of-the-art burn technology and highly detailed logs provide the look of an authentic wood-burning fire

- a. Glowing ember bed in the Ravelle™ 30 creates authentic-appearing fire presentations
- b. Hand-painted logs cast from real wood in the Ravelle 42 offer a genuine hearth appearance whether the fireplace is on or off

Realistic fireplace depth

200-CFM blower

High-efficiency wall-furnace-rated fireplace operates without electrical power

Heavy, 12-gauge aluminized steel firebox construction

Limited Lifetime Warranty

### OPTIONAL ACCESSORIES

Whole-Home Comfort System™ provides superior comfort by circulating warm air throughout your home

Forced-air duct kit allows you to duct heat from your Ravelle into adjoining rooms (available on Ravelle 42 only)


Wall thermostat

Remote thermostat (available on Ravelle 42 only)

## WHOLE-HOME COMFORT SYSTEM™

EVEN HEAT FOR YOUR HOME

The exclusive Whole-Home Comfort System uses a pressure-differentiating cold air return system to circulate heated air from your Ravelle™ gas fireplace throughout your home, warming your entire house, not just one room. This system is designed to work with or without a blower. The Whole-Home Comfort System utilizes natural convection to function effectively, even during a power outage. Ask your dealer for details.

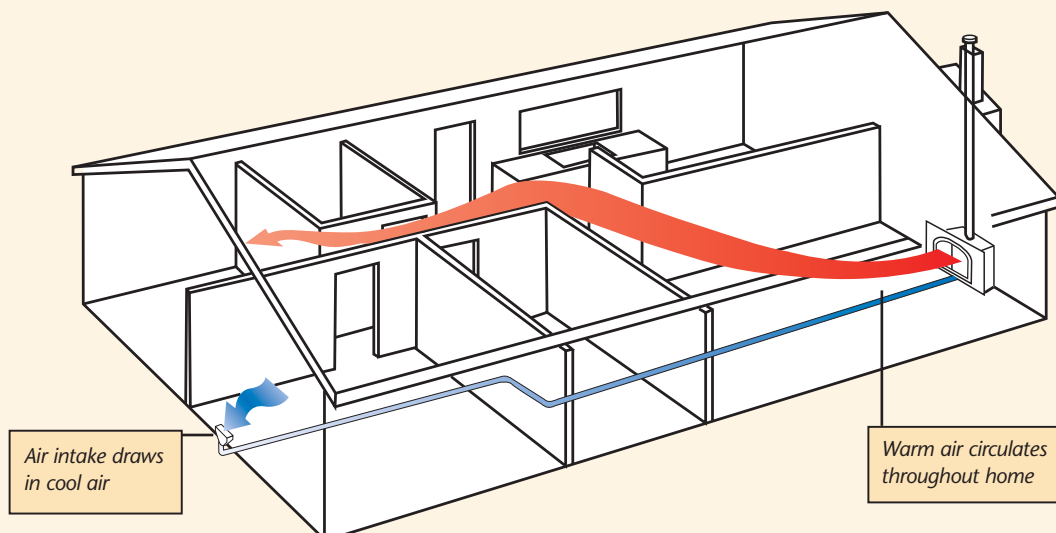

## SPECIFICATIONS

### RAVELLE™ 30

<b>HEATING CAPACITY*</b>	UP TO 1,400 SQ. FT.
<b>FIREPLACE WEIGHT</b>	200 LBS.
<b>BTU INPUT - NATURAL GAS</b>	HIGH 30,000 / LOW 20,000
<b>LP GAS (PROPANE)</b>	HIGH 28,500 / LOW 20,000
<b>CANADIAN ENERGYGUIDE RATING</b>	NATURAL GAS 56.88% LP GAS (PROPANE) 67.04%
<b>STEADY-STATE EFFICIENCY**</b>	82% – 86%
<b>BLOWER</b>	200-CFM VARIABLE-SPEED BLOWER
<b>DV PIPE DIAMETER</b>	4" x 6-5/8" SECURITY™ SECURE VENT™ OR OTHER

### RAVELLE 42


<b>HEATING CAPACITY*</b>	UP TO 2,250 SQ. FT.
<b>FIREPLACE WEIGHT</b>	250 LBS.
<b>BTU INPUT - NATURAL GAS</b>	HIGH 42,000 / LOW 29,500
<b>LP GAS (PROPANE)</b>	HIGH 37,000 / LOW 25,000
<b>CANADIAN ENERGYGUIDE RATING</b>	NATURAL GAS 50.43% LP GAS (PROPANE) 53.47%
<b>STEADY-STATE EFFICIENCY**</b>	83% – 86%
<b>BLOWER</b>	200-CFM VARIABLE-SPEED BLOWER
<b>HORIZONTAL DV PIPE</b>	5" x 8" SECURITY SECURE VENT OR OTHER
<b>VERTICAL DV PIPE</b>	4" x 6-5/8" SECURITY SECURE VENT OR OTHER

\*Square-foot heating capacities are approximations only. Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.  
\*\*Efficiency varies slightly with various pipe configurations.

## CLEARANCES


	30	42
<b>A</b> FACE TO MANTEL	13"	16"
<b>B</b> FACE TO TOP FACING	8-1/2"	10"
<b>C</b> FACE TO SIDE FACING OR SIDE WALL	3-3/4"	3-1/2"
<b>D</b> SIDE FACING OR SIDE WALL TO OUTSIDE EDGE OF GLASS DOOR FRAME	6-1/4"	7-1/2"
<b>E</b> NON-COMBUSTIBLE CONCRETE BOARD (TOP)	10"	10"
<b>F</b> NON-COMBUSTIBLE CONCRETE BOARD (SIDE)	5"	3"
<b>G</b> HEARTH EXTENSION*	N/A	N/A
<b>H</b> MINIMUM COMBUSTIBLE MANTEL HEIGHT FROM (8" OVERHANG) BASE OF FIREPLACE	38-1/2"	47-5/8"
	(8" OVERHANG)	(7-1/2" OVERHANG)

\*Hearth extension is always recommended and required in some cases—see manual for details.

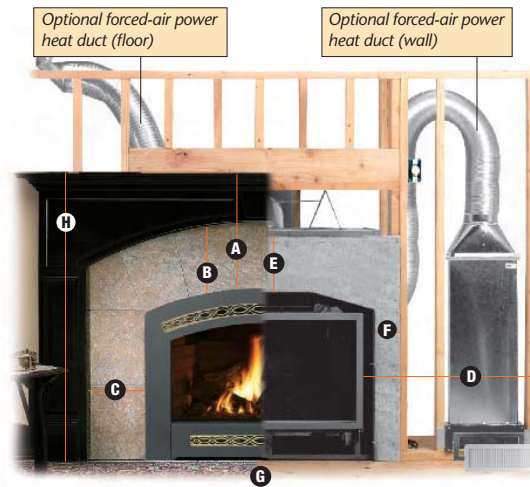

Shown with conceptual illustration of optional forced-air power heat ducting (Ravelle 42 only). Refer to manual for details.

## DIMENSIONS

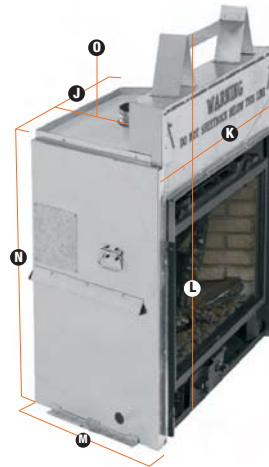

	30	42
<b>J</b> REAR WIDTH*24-1/2"	29-3/4"	
<b>K</b> FRONT WIDTH	41"	43"
<b>L</b> OVERALL UNIT HEIGHT TO TOP OF HEADER STAND-OFF	40-3/4"	47-3/4"
<b>M</b> UNIT DEPTH*	21"	20-3/4"
<b>N</b> REAR HEIGHT	27-1/8"	35-1/2"
<b>O</b> BACK OF FIREPLACE TO CENTERLINE OF FLUE STARTER COLLAR	8-1/2"	10-3/4"

\*These dimensions include the 3/4" stand-offs.


Refer to manual for multiple horizontal and vertical vent pipe configuration approvals.

## FRAMING DIMENSIONS

Minimum framing distances necessary to maintain safe clearances to combustible materials.

Note: The fireplace may be placed directly on wood or non-combustible floor, but not on vinyl floor covering or carpet.

	30	42
<b>P</b> (WIDTH)	41-1/2"	44-1/2"
<b>Q</b> (HEIGHT)	41"	48"
<b>R</b> (DEPTH)	21"	21"

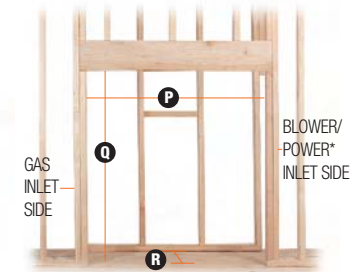

\*Fireplace is not dependent on fan or outside electrical supply to operate.

## PRODUCTS YOU CAN COUNT ON


Lennox is committed to providing you with high-quality products. A qualified dealer can help you find the right product to give you years of comfort and enjoyment.

# LENNOX

## HEARTH PRODUCTS

© Lennox Industries Inc. 2010

Visit us at [www.lennox.com](http://www.lennox.com), or contact us at 1-800-9-LENNOX.



### IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuation without notice.



Tested & Listed By **O-T-L** Portland Oregon USA  
**CPII** US  
OMNI-Test Laboratories, Inc.